

1 **Analysis of the Safety Effects of Traffic, Geometric and Access Parameters**
2 **on Truck Arterial Corridors**

3 Most Afia Sultana
4 Research Assistant
5 Department of Civil & Environmental Engineering
6 South Dakota State University
7 Brookings SD 57006
8 Fax: (605) 655-6474
9 Email: most.sultana@jacks.sdstate.edu

10
11 Xiao Qin, Ph.D., P.E.
12 (Corresponding author)
13 Associate Professor
14 Department of Civil and Environmental Engineering, South Dakota State University
15 CEH 148, Box 2219, Brookings, SD, 57007
16 Phone: (605) 688-6355
17 Fax: (605) 688-6476
18 Xiao.qin@sdstate.edu

19
20 Madhav Chitturi, Ph.D.
21 Associate Researcher
22 Traffic Operations and Safety (TOPS) Laboratory, University of Wisconsin-Madison
23 Department of Civil and Environmental Engineering
24 B243 Engineering Hall
25 1415 Engineering Drive
26 Madison, WI 53706
27 Phone: (608) 890-2439
28 mchitturi@wisc.edu

29
30 David A. Noyce, Ph.D., P.E.
31 Professor
32 Director, Traffic Operations and Safety (TOPS) Laboratory, University of Wisconsin-Madison
33 Department of Civil and Environmental Engineering
34 1204 Engineering Hall
35 1415 Engineering Drive
36 Madison, WI 53706
37 Phone: (608) 265-1882
38 noyce@engr.wisc.edu

39
40 **Word count: 5450 +8 (4 Tables and 4 Figure)*250 = 7450**

41
42 **Submitted for Presentation and Publication to the**
43 **93rd annual meeting of the Transportation Research Board**
44 **January 12-16, 2014**
45 **Washington, DC**

1 **ABSTRACT**

2 According to the National Highway Traffic Safety Administration (NHTSA), over 400,000
3 truck-related crashes occurred in 2009; approximately 7,800 of those were fatal. Truck-related
4 crashes undermine truck's remarkable contribution to the United States economy. Truck safety
5 research on arterial streets is considerably disproportionate when compared with the extensive
6 studies of freeway truck safety. Identifying critical factors contributing to truck-related crashes
7 and developing remedial and preventive strategies to reduce truck-related crashes and their
8 consequences on arterials is imperative.

9 Truck-related crashes can be mitigated through careful planning of the location, design,
10 and operation of driveways, median openings, and street connections. In this study, access
11 related data were collected manually in addition to roadway geometric characteristics. The
12 augmented data offered more explanation and prediction power to truck crashes. Standard
13 deviation of commercial driveway throat width, commercial driveway throat width with flare and
14 its standard deviation, proportion of divided commercial driveway, minimum distance of a
15 driveway to the signalized intersection, signal density and shoulder width were significant
16 factors for the crash frequency prediction. Generalized negative binomial (GNB) model was used
17 to identify sources of data overdispersion. This study found that some previously significant
18 variables are no longer significant after adding access parameters demonstrating the impact of
19 access parameters on truck related crashes on arterials. This noticeable change in the statistical
20 models composed of different variables is a reminder that a spurious relationship can form if a
21 causal relationship is nonexistent.

22

23

1 INTRODUCTION

2 Arterial roads collect traffic from local roads and channel it to freeways, providing both mobility
3 and accessibility. Good access management of arterial roads involves balancing the dual role of
4 the arterial roadway: corridors for through traffic and access to adjacent properties and economic
5 activities. Some key factors commonly identified in the literature as directly influencing safety
6 performance of arterial highways include driveway spacing, signal density, driveway design,
7 driveway proximity to intersections and interchanges, median configuration, geometric design
8 elements, land use and signal timing plan.

9 Arterial safety conditions are critical because of the numerous access points, turning
10 movements, and mixture of transportation modes, which can be complicated by various traffic
11 control devices and strategies. For arterial movement, roadway characteristics such as lane
12 width, shoulder width, posted speed limit, median width, horizontal/vertical curvature and
13 pavement surface conditions are important determinants in safety, as each of these components
14 relates to a certain level of service when the arterial acts as a thoroughfare. From an access
15 perspective, driveways and median opening densities are important measures related to safety as
16 each of them adds to the number of conflicts for vehicles along a roadway during egresses and
17 ingresses. While it is certainly necessary to ensure movement, it is also important to
18 accommodate access to commercial and residential properties; thus, the number, type, spacing
19 and location of driveways and median openings need to be planned carefully. Therefore, it is
20 important for local governments, road authorities and land developers to coordinate access
21 decisions based on the arterial's desired level of safety, mobility and accessibility.

22 Driveway related crashes amounted more than 10% of total crashes in Iowa, Indiana and
23 Michigan (1-3). In Maine, 1 in 6 crashes occurred at driveways or entrances; 1 in 5 people
24 involved in crashes were involved in driveway or entrance related crashes in 1996 (4). Rawlings
25 and Gattis (5) examined over 2,000 accident reports from Springdale, Arkansas for one year to
26 identify which crashes were driveway-related. "Driveway-related" was defined as a collision that
27 occurred either directly or indirectly due to the operation of a driveway. Researchers found that
28 the 1/6 of crashes involved left-turn egresses (5). The proportion of driveway related accidents to
29 the overall accident numbers seen in these states illustrates the magnitude of the problem.
30 However, the solution to the problem is not simply limiting, reducing or closing the access
31 points, but providing access at proper locations and designing them in a manner that is safer and
32 more effective.

33 Due to the substantial truck-passenger vehicle interactions that occur on arterial streets, it
34 is necessary to study the relationship between truck safety and arterial access management, while
35 also considering the geometric characteristics and traffic control. Therefore, the main objective
36 of this study is to identify the safety impact of access related phenomena on truck arterial
37 corridors. The study begins with an extensive literature review and focused on collecting data
38 relating to access parameters. To investigate the consequences of incorporating access related
39 variables in the previous model (6), two negative binomial models were compared, and the
40 implications of the statistically significant variables were discussed based on the study context.

41

42

1 LITERATURE REVIEW

2 Arterial streets are the “last miles” for trucks when delivering freight to commercial and
3 residential destinations or entering the freeway system. Frequent and direct access from
4 commercial and residential properties to an arterial road reduces the capacity and creates
5 substantial opportunities for crashes. Increasing the spacing between access points helps reduce
6 the number and variety of events to which drivers must respond. In addition, greater access
7 spacing gives drivers more time to perceive, react, and navigate safely. Truck crashes in many of
8 the counties of Wisconsin have continued to increase in recent years, particularly on arterial
9 streets (7). The increase in truck crashes has become a major issue for the researchers and
10 transportation officials who frequently debate on the cost effectiveness of implementing access
11 management techniques (i.e., raised medians, or driveway consolidation) to alleviate some of the
12 safety concerns. Application of access management best practices has benefits for motorists,
13 transit riders, planning and government agencies, and communities.

14 In recent years, access management along arterial streets started to gain attention from
15 researchers (8-11). Using microscopic traffic simulation models for 11 arterial corridors, Eisele
16 and Frawley estimated the relationships between crash rates and access point (driveways and
17 public street intersections) densities, with or without the presence of raised medians or two-way
18 left-turn lanes (8). They concluded that as access point density increases, there is an increase in
19 crash rates which is irrespective of the median type. However, the researchers also found that the
20 relationship between access density and crash rate is higher on roadways without raised medians.
21 Lee et al. (11) analyzed the crashes that occurred at midblock of an urban arterial road using log-
22 linear models to show that midblock crashes are more likely to occur on road sections with
23 access points and a high percentage of trucks (>20%). Results show that median opening, driver
24 age/gender, lighting, time of day and day of week are associated with different types of crashes
25 classified by the vehicles involved in crashes. Lee’s study shows the importance of analyzing
26 divided urban arterial midblock crashes with high truck volume by travel direction, as the
27 complex interaction among cars and trucks is influenced by more frequent egress and ingress
28 driveway traffic.

29 Numerous studies have been conducted on the relationship between access management
30 techniques and safety, specifically when it comes to access spacing, corner clearance and
31 medians (13-17). Schultz et al. (14-16) undertook several studies on urban arterial access
32 management and safety in order to determine the safety benefits provided by access management
33 techniques in Utah. Statistical analyses showed that on roadways that included high access
34 density, numerous signals per unit length and lack of medians were positively related with
35 increased crash rate and severity. In particular, crash totals, crash rates and rear-end crashes in
36 intersection functional areas increase with the increase in commercial access density. In a follow-
37 up study, the researchers proved that raised medians and driveway consolidation can change the
38 crash pattern or manner of collision and the injury severity. Gluck, Levinson, and Stover (18)
39 stated that doubling the access frequency from 10 to 20 access points per mile would increase
40 accident rates by 40 percent. A road with 60 access points per mile would have tripled the
41 accident rate as compared with a density of 10 access points per mile. Each additional access
42 point increases the accident rate by about 4%. The results suggest a generally consistent
43 relationship - the greater the frequency of driveways and intersections, the greater the number of
44 accidents. Gattis et al. (19) presented six major considerations for driveway design, including

1 maintaining or improving the efficiency and safety of the intersecting roadway, and providing
2 adequate sight distance for road and sidewalk users. Stover and Koepke (20) indicated that two-
3 way driveways allow for simultaneous two-way operations, and thus it is better to have separate
4 entrance and exit lanes.

5 Adequate spacing and design of access to crossroads in the vicinity of freeway ramps
6 avoids traffic backups and preserves safe and efficient traffic operation (21). A methodology was
7 developed by Rakha et al. (13) to quantitatively evaluate the safety impacts of different access-
8 spacing standards in Virginia. According to their analysis, shortcomings exist in the AASHTO
9 standards, and significant safety benefits can be achieved by adopting stricter standards such as
10 those recommended in the TRB Access Management Manual. For example, an increase in the
11 minimum access spacing from 300 ft to 600 ft results in a 50% reduction in the crash rate.

12 In Wisconsin between 2005 and 2009, 7.4 percent of midblock crashes were related to
13 access movements, and 20 percent of intersection crashes were related to turning left into the
14 selected truck preferred arterial corridors (7). Though numerous studies have been conducted in
15 hopes of capturing the contributing factors to crashes due to access related variables,
16 nevertheless, the impacts of access related variables together with traffic, geometric and
17 pavement variables were not specifically considered truck preferred corridors. Being motivated
18 by plan and design of safer corridors heavily used by trucks, this study aims to enrich the current
19 body of knowledge through informed data collection and statistical models. It is expected that
20 the cause-effect relationships between crashes and presumed crash causal factors will be
21 explored.

22 **DATA COLLECTION AND PROCESSING**

23 Data used in this research consisted of five years (2005 to 2009) of crash counts, as well as
24 geometric, pavement, access related data and traffic volume data. Truck crashes were retrieved
25 from the online Wisconsin crash database through the WisTransportal System (7). In order to
26 undertake the investigation of truck crashes from a corridor perspective based on arterial roads,
27 truck corridor selection was confined to principal arterials and minor arterials. Truck corridors
28 were identified based on criteria established in a previous study (6). The number of corridors has
29 been changed from 100 to 74 because this study considered the corridors with signalized
30 intersections. Descriptive statistics for key variables used in the crash frequency model can be
31 seen in Table 1.

32 As shown in Table 1, five year crash total had a mean of 93 and a standard deviation of
33 79, with a maximum of 407 crashes. Corridor lengths vary from relatively short (1.03 mi) to very
34 long (16.94 mi), with an average segment length of 4.88 mi. The mean corridor AADT was
35 17,825. Most access-related variables are not readily available in any GIS or table format,
36 meaning the most reliable source for collecting this information is through manual measurements
37 of aerial photographs. Considerable effort has been made to collect access related variables such
38 as median opening width, length of left turn bay, length of two way left turn lane, driveway
39 width and driveway width with flare. These variables were measured from Google Earth and
40 Google Map images, and the mean and standard

41

1 **TABLE 1 Summary Statistics of Crash, Traffic and Access Related Variables**

Variable Name	Description	Avg	Stdv	Min	Max
Crash count	5 year crash count for each corridor	93	79	14	407
L	Length of the corridor (miles)	4.88	3.42	1.03	16.94
AADT	Annual average daily traffic	17825	6126	8346	39435
AATT	Annual average daily truck traffic	1126	213	796	1892
W_Med_Op	Average width of median opening within a corridor (ft)	71.16	14.41	36	97.14
Stdv_W_Med_Op	Standard deviation of median opening width (ft)	18.95	8.81	0	44.39
Med_den	Median opening density (per mile)	4.48	3.56	0	17.64
Min_Dist	Minimum distance of a driveway to a signalized intersection (ft)	134	252	0	1920
TWLTL	Length of Two Way Left Turn Lane(mi)	0.70	0.79	0.06	3.58
L_LT	Average length of left turn bay within a corridor (ft)	178	72	60	451
Stdv_L_LT	Standard deviation of length left turn bay length (ft)	68.73	33.70	15.29	197
R_Throat_W	Average width of driveway (ft)	12.86	2.61	8	22.03
R_Stdv_Throat_W	Standard deviation of driveway width(ft)	3.91	2.35	0.70	15.80
R_Flare_W	Average width of driveway with flare (ft)	25.49	9.36	8	61
R_Stdv_Flare_W	Standard deviation of driveway width with flare (ft)	7.36	6.51	0.78	46.60
C_Throat_W	Average throat width of driveway (ft)	28.34	4.17	19.80	37.10
C_Stdv_Throat_W	Standard deviation of driveway throat width (ft)	9.27	3.15	4.16	17.87
C_Flare_W	Average width of driveway with flare	48.07	15.75	25.20	112.3
C_Stdv_Flare_W	Standard deviation of driveway width with flare	19.88	11.0	5.10	56.43
Drv_SigInt	Average number of driveway located within .1 mile from Signalized Intersection	17.38	14.36	0	40
C_Div_Drv	Proportion of divided driveway, Commercial	0.33	0.18	0	0.67
Drv_den	Driveway density for a corridor/ mile	17.09	11.50	1.10	54.70
C_Den	Number of Commercial driveway per mile	9.57	7.37	0.9	41.30
R_Den	Residential driveway density / mile	7.51	7.15	0.0	34.20
Sig_Den	Signal density (signals/mile)	1.52	1.01	0.12	4.85
PSI	Pavement Serviceability Index	2.86	0.81	0.88	4.35
STD(PSI)	Standard deviation of PSI	0.61	0.43	0	1.98
SHWD	Shoulder width	3.10	2.95	0	10


1 deviation of each was calculated. Median opening width, left turn bay length, minimum distance
2 to a signalized intersection and intersection functional area are illustrated in Figure 1. The
3 corridor start and end point was carefully identified by matching the attributes of these corridors
4 in the GIS shapefile. Signal, median opening and driveway density were calculated by the ratio
5 of their count to corridor lengths.

6 Driveways were categorized as either residential or commercial (commercial driveway
7 includes commercial, industrial, institutional etc.) by counting the number of visible parking
8 spots. Primarily, driveway turn radius, driveway throat width, driveway throat length, driveway
9 slope, existence of dedicated turn lanes, and length of sight distance (especially for drivers
10 exiting driveways) were considered as the key driveway design factors. However, due to time
11 limitation and technical difficulties (e.g. driveway slope), data collection was eventually limited
12 to three aspects – driveway throat width, driveway throat width with flare and number of divided
13 driveways. Figure 2 shows how throat width and throat width with flare measurements were
14 taken.

15 The maximum driveway density, 54.7, exists in a 1.17 mile-long corridor where a total of
16 64 driveways - 30 commercial and 34 residential - were counted. Many researchers recommend
17 20 to 30 driveways per mile as a maximum driveway density standard; above that standard,
18 accident rates may increase significantly. This standard applies to commercial driveways on
19 urban, multilane arterials with a posted speed limit of 35 miles per hour (22). In this data 17
20 corridors with an average of 45 mph posted limit have more than 30 driveways per mile. High
21 speed limits suggest lower driveway density if the roadway is primarily functioning toward
22 through traffic (i.e. higher movement demands are more important than the need for access).
23 Hence, some truck preferred arterial corridors may have safety compromises such as high
24 number of collision points and crash rate.

25 The functional area of an intersection includes the area beyond the physical junction of
26 two roadways that comprises decision and maneuvering distance, plus any required vehicle
27 storage length. Limiting or, when possible, eliminating driveways within the functional area of
28 an intersection (upstream and downstream) helps reduce crashes while traveling through an
29 intersection and reduces possible driver errors. It is important that the influence of any driveway
30 access should be minimized at the functional area of an intersection, as driveway traffic may
31 result in higher crash rates and increased congestion. According to the Manual of Uniform
32 Traffic Control Devices (Federal Highway administration, 2009), the crashes that occur within a
33 15 m to 152 m (50-500 feet) radius from the center point of an intersection are classified as
34 intersection-related crashes (23). In order to assess the safety impact of a driveway within an
35 intersection's functional area, two variables were collected: minimum distance of a driveway to a
36 signalized intersection, and the total number of residential and commercial driveways that are
37 located within 500 feet of a signalized intersection. Figure 3 illustrates the number of driveways
38 that are located within the intersection's functional area.

1

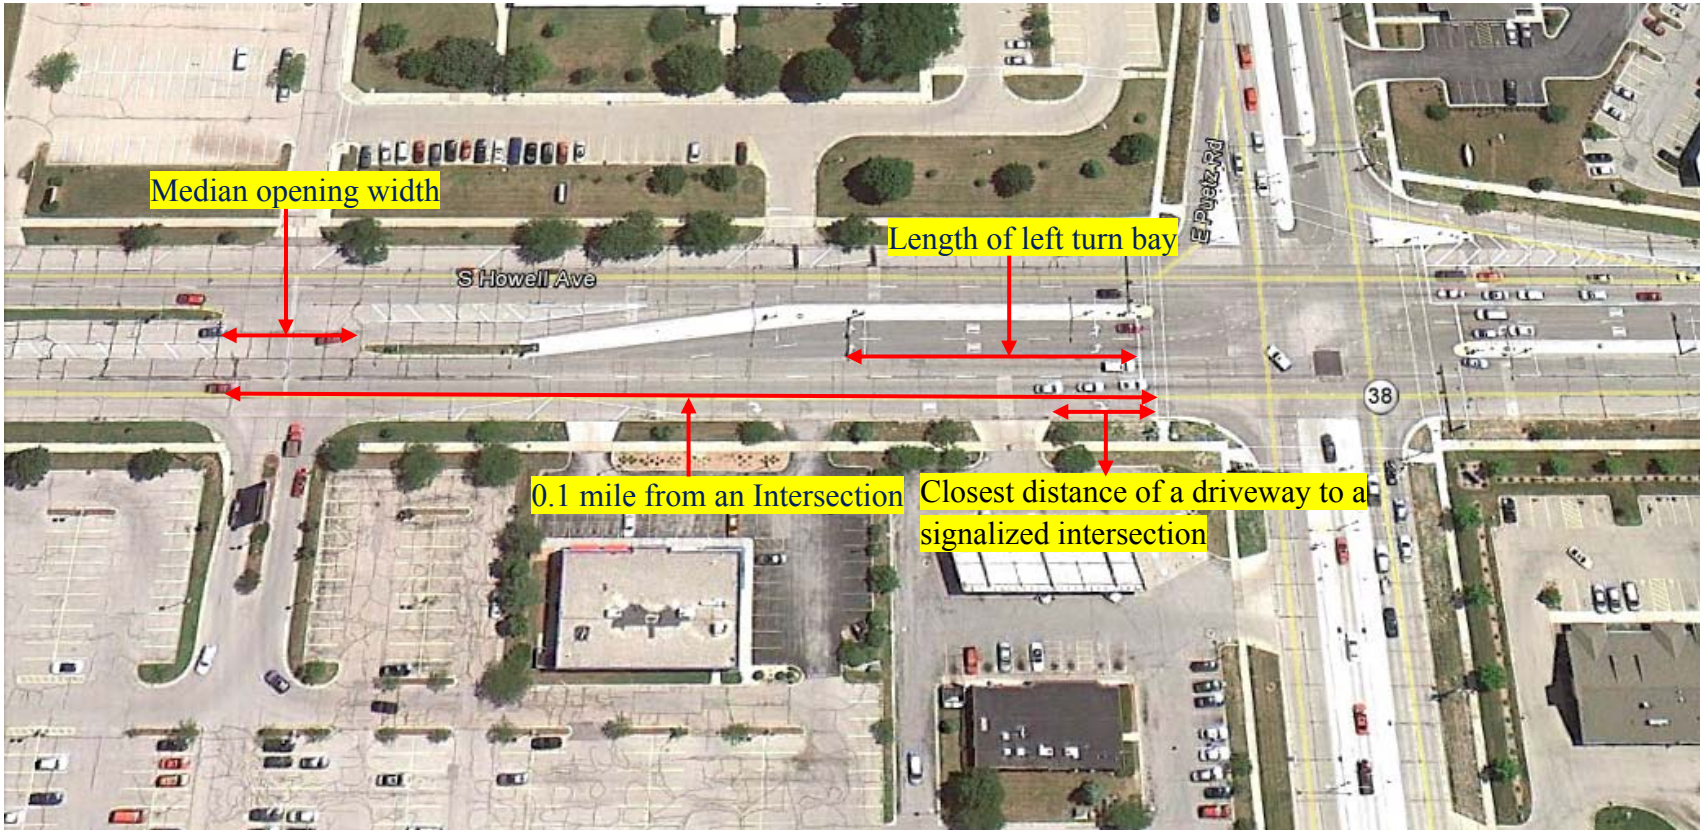

2
3
4
5
6
7
8
9

FIGURE 1 Roadway access related components.



(a) Residential

(b) Commercial

FIGURE 2 Driveway configurations.

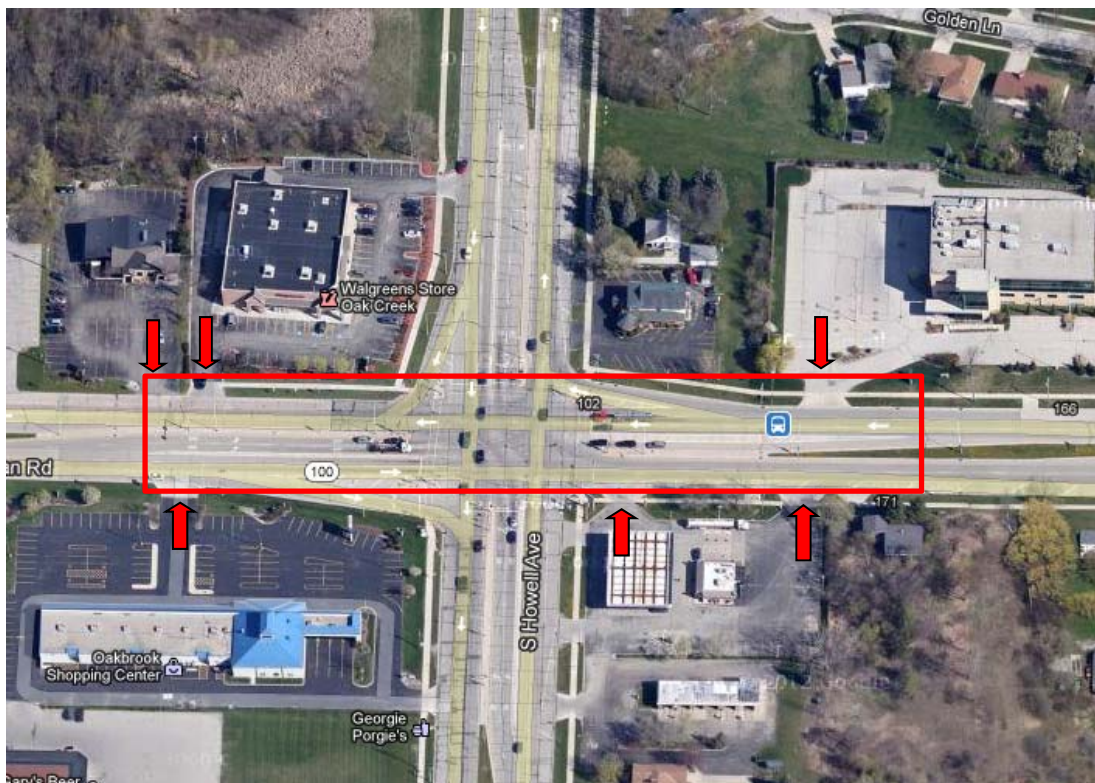


FIGURE 3 Functional area of an intersection.

Generally there are three median types in use: a raised median, a painted median and a two-way left turn lane (TWLTL). Continuous TWLTLs are a common access management treatment when combined with driveway consolidation and corner clearance. TWLTLs provide a separate lane for vehicles turning into property access. In our study, only 23 out of 74 corridors have this kind of median treatment. Continuous raised medians with well-designed median openings are also common access management treatments, and are among the most important

1 features when creating a safe and efficient highway system. Median openings should generally
 2 only be provided at public road intersections or at driveways shared by several businesses. The
 3 number of median openings should be kept to a minimum since they add conflict points and
 4 detract from safety. In this study, data for median opening width and the number of median
 5 openings for a roadway segment with raised medians was collected.

6 **METHODOLOGY**

7 Count-data modeling (Poisson, negative binomial) techniques are widely used for crash
 8 frequency as the number of accidents n_i on roadway segment per unit of time is a non-negative
 9 integer. When the variance is larger than the mean, the data is said to be overdispersed. Over-
 10 dispersed count data is usually modeled with a negative binomial distribution because the
 11 Poisson distribution has a restrictive assumption of equal variance and mean. In a Poisson model,
 12 the probability of the number of truck crashes for corridor i , n_i is as follows:

$$13 \quad P(n_i) = \frac{\exp(-\lambda_i)\lambda_i^{n_i}}{n_i!} \quad (1)$$

14 where $P(n_i)$ is the probability of a corridor i having n_i crashes and λ_i is the expected number of
 15 crashes in corridor i . The negative binomial model is an extension of the Poisson where the
 16 Poisson parameter λ follows a gamma probability distribution. The standard log link function for
 17 the negative binomial model can be expressed as a linear model of the covariates in Equation 2.

$$18 \quad \lambda_i = \exp(\beta_0 + \beta_1 x_{1i} + \dots + \beta_k x_{ki}) \exp(\epsilon_i) \quad (2)$$

19 where β s are coefficients of explanatory variables and $\exp(\epsilon_i)$ is the term adjusting for
 20 overdispersion and is gamma distributed. The models were estimated by using generalized linear
 21 modeling. For this modeling, STATA was used (24).

22 Generalized negative binomial (GNB) is a generalization of the negative binomial mean-
 23 variance structure where the over-dispersion parameter alpha (α) may also be parameterized
 24 specifically to account for the data heterogeneity. The GNB extends the negative binomial model
 25 by allowing user-specified parameterization of the ancillary parameter, α . There are two uses of
 26 the GNB model. First, parameterization of α provides information regarding which predictors
 27 influence overdispersion. Second, it is possible to determine whether overdispersion varies over
 28 the significant predictors of α by observing the differential values of its standard errors. If the
 29 standard errors vary only a little between parameters, the overdispersion in the model can be
 30 regarded as constant (25).

31 **RESULTS**

32 Given the importance of access data on arterial street traffic safety, manually collected access
 33 data elements were added to the model link function in addition to the available geometric and
 34 traffic data. This augmented data was expected to offer more explanation and prediction power
 35 to truck crashes. Pearson correlation test has been performed before the variables were put in the
 36 statistical models. After several iterations, the statistically significant variables were listed in
 37 Table 2. The Akaike information criterion (AIC) has been used as a statistical goodness-of-fit.
 38 The general formula is $AIC = 2k - 2\ln(L)$ where k is the number of parameters in the statistical
 39 model and L is the maximized value of the likelihood function for the estimated model. Column

1 3 & 4 represents t-value and 2-tailed p-value which are used for testing the null hypothesis.
 2 Coefficients having p-values less than alpha (.05) are statistically significant.

3 The design and location of commercial driveways, which are frequently used by trucks,
 4 appears to affect the safety performance of a corridor. Significant factors in crash frequency
 5 prediction include standard deviation of commercial driveway throat width, flared commercial
 6 driveway throat width and its standard deviation, proportion of divided commercial driveway,
 7 minimum distance of a driveway to the signalized intersection, signal density and shoulder
 8 width. Amongst all statistically significant variables, flared commercial driveway throat width,
 9 shoulder width, minimum distance of a driveway to the signalized intersection and proportion of
 10 divided commercial driveway are negatively associated with the number of truck crash
 11 prediction. These variables help to provide insightful, logical and meaningful explanation to the
 12 cause-effect relations of truck crashes.

13 **TABLE 2 Negative Binomial Estimates for Crash Frequency Prediction**

Effect	Estimate	Std. Err.	t-value	Pr > t
Intercept	3.0377	0.3119	9.74	0.000
TMT (truck million miles traveled)	0.1033	0.0095	10.78	0.000
Standard deviation of driveway throat width (ft)	0.0475	0.0184	2.58	0.027
Average width of driveway with flare	-0.0111	0.0041	-2.70	0.019
Standard deviation of driveway width with flare	0.0143	0.0057	2.48	0.008
Proportion of divided driveway, Commercial	-0.5748	0.2847	-2.03	0.042
Shoulder width	-0.0428	0.0215	-1.99	0.044
Signal density	0.3324	0.0704	4.60	0.000
Dispersion	0.1611	0.0280	5.72	0.000
AIC = 726				

14 The standard negative binomial model is often criticized because of its fixed
 15 overdispersion parameter α . Researchers are keen to find the source of this overdispersion (26-
 16 27). Heterogeneous or GNB regression is a valuable method for assessing the source of
 17 overdispersion (25). GNB can be used to differentiate sources influencing the model parameter
 18 estimates from sources influencing overdispersion. Through overdispersion factor
 19 parameterization, predictors influencing the value of α , can be determined by establishing a
 20 functional relation between them, and estimated by including the function in the overall model
 21 estimation. It was hypothesized that AADT, TMT, signalized intersection density, driveway
 22 density, etc. may be contributing factors to α . Table 3 attempts to formulate the parameters as the
 23 sources of overdispersion including signal density, proportion of divided commercial driveway,
 24 and truck miles traveled. The significant variables of NB are statistically significant in GNB for
 25 the truck crash prediction. The AIC indicates that GNB yields a better goodness of fit than the
 26 NB model.

27

1 ANALYSIS AND DISCUSSION

2 Based on the model results it is apparent that the commercial driveway design components – not
3 including the geometric features – are a very intriguing issue for the truck-preferred arterial
4 corridors. The following section is an effort to enhance understanding of the findings that
5 influence the occurrence of a crash either positively or negatively.

6 **TABLE 3 GNB Estimates for Accident Frequency Prediction**

Effect	Estimate	Std. Err.	t-value	Pr > t
Constant	2.7659	0.30204	9.16	0.000
TMT (truck million miles traveled)	0.12508	0.01644	7.61	0.000
Standard deviation of driveway throat width (ft)	0.05526	0.0171	3.23	0.001
Average width of driveway with flare	-0.0086	0.00422	-2.03	0.042
Standard deviation of driveway width with flare	0.01638	0.00518	3.16	0.002
Proportion of divided driveway, Commercial	-0.6893	0.29692	-2.32	0.020
Shoulder width	-0.0588	0.01954	-3.01	0.003
Signal density	0.30074	0.06639	4.53	0.000
ln(α)				
TMT	0.10707	0.04503	2.38	0.017
Proportion of divided driveway, Commercial	-3.5114	1.43085	-2.45	0.014
Signal density	0.577	0.2546	2.27	0.023
Constant	-2.6737	0.63455	-4.21	0.000
AIC=718				


7 Commercial Driveway Design

8 An important component of access management involves managing traffic movements into and
9 out of commercial driveways. The reason for this is that a large number of crashes on arterial
10 streets involve commercial driveways. Commercial driveway width is important because it has a
11 significant impact on the ease of entry into the driveway. A larger radius results in easier egress
12 and ingress for passenger cars as well as commercial motor vehicles so that the driveway
13 movement can be performed without abruptly slowing down or substantially encroaching into
14 other roadway lanes and driveway lanes. The more quickly a vehicle can enter a driveway, the
15 less likely there is a rear-end collision. According to the TRB Access Management Manual (21),
16 simultaneous entry and exit by a single unit truck must have a driveway throat width of 40 feet.
17 Our estimate indicates that 18 percent of corridors appear to have a higher number of crashes
18 because they contain driveway throat width with flare less than 40 feet and 38 percent of
19 corridors have a lower number of crashes because they contain driveway width with flare greater
20 than 40 feet. Varying width (standard deviation of throat width and throat width with flare) leads
21 to a situation where the driver is not guided to the best position for driveway movements. In this
22 case, pavement marking becomes vital to guide the driver toward the entering the road.

23

1 Signalized Intersection Density

2 Although most discussions about access management focus on the management of private
 3 driveways, proper spacing of signalized intersections is an equally important issue. The
 4 importance of intersection spacing is similar to that of driveway spacing; as the number of
 5 intersections per mile increase, the opportunity for crashes increases. The existence of too many
 6 intersections per mile also increases delay and congestion. Stover and Gluck (18, 28) reported
 7 that crash rates increase as the number of signalized intersections per segment increases. The
 8 average crash rate can be increased by up to 200 percent when the signal density along a given
 9 segment is increased from two to four signals per mile, depending on the number of un-
 10 signalized access points along the same segment (21). To test the findings of the previous
 11 literature, a sensitivity analysis was performed to capture the impact of the signalized
 12 intersection density. Figure 4 shows that crash density increases exponentially with the increase
 13 of signal density. Thus, for higher values of signal density, crash density will increase at a higher
 14 rate than for lower values of signal density.

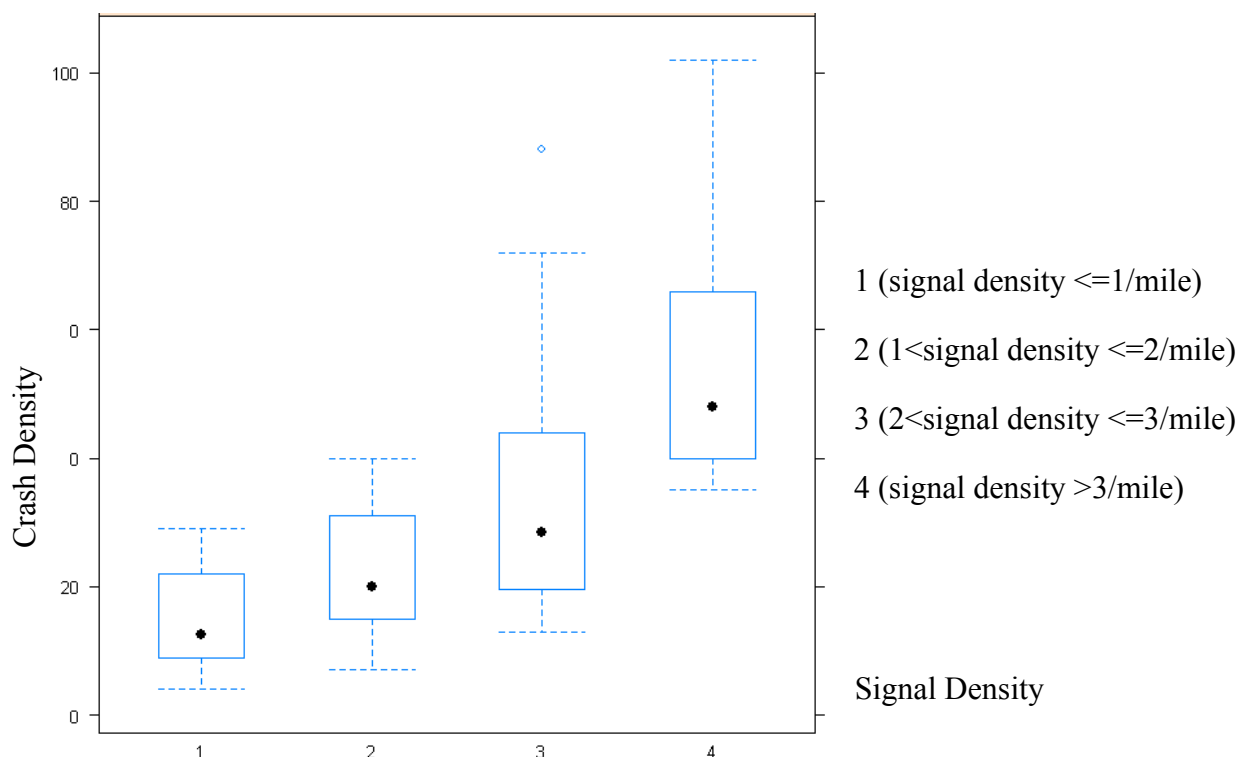

15
16 **FIGURE 4 Crash density versus signal density.**

17 Comparison between Two Models

18 The addition of the access-related variables led to different results from the previously selected
 19 corridors (6) as illustrated in Table 4. AADT, PSI and its standard deviation are no longer
 20 statistically significant for predicting truck crashes. One of the interesting findings of this study
 21 is that the presence of more relevant variables can nullify the effect of statistically significant
 22 variables that are less relevant. Under the guided data collection, the access variables represent a
 23 relationship between truck crashes and access design and management. This relationship not
 24 only displays the statistically significant correlation between truck-related crashes on arterials
 25 and access management but corrects the spurious causality between crashes. An inappropriate

1 choice can create statistical artifacts. The statistical artifact is a difficult issue to address because
 2 it can be caused by the choice of faulty variables or function misspecification. A well designed
 3 data collection guided by the appropriate knowledge of highway safety can mitigate the negative
 4 impact of statistical artifacts.

5 The negative sign of the PSI coefficient suggests that the probability of a crash
 6 occurrence becomes higher on distressed pavement. One could argue that a poor pavement
 7 condition caused by rutting, potholes, failures and cracking forces drivers to be more wary and
 8 travel slower, resulting in fewer crashes or less severe injuries. Smoother pavements may allude
 9 to faster driving conditions and consequently higher driving speeds, which increase the
 10 probability of frequency and the severity of a crash. One can also argue that poor pavement
 11 condition causes drivers to swerve or stop in order to avoid damage to the vehicle, therefore
 12 compromising one's safety. The dilemma exists because the variable can be confounded with
 13 other unobserved or unavailable factors such as driver behavior. The solution can be difficult
 14 without a good understanding of how the variables interact with one another. Unavailable data
 15 could be an additional difficulty. The alternative is to seek new variables without ambiguous
 16 influence on safety. In this study, the added commercial driveway design data gives more insight
 17 and logical explanation to the truck crash without comprising the statistical goodness-of-fit.

18 **TABLE 4 NB Estimates for Crash Frequency Prediction**

Effect	Estimate (t-value)		
	Without Access Data ¹	With Access Data	Final Model ²
Intercept	2.75 (11)	2.93 (7.6)	3.03 (9.74)
TMT	0.84 (10.2)	0.095 (9.36)	0.103 (10.78)
Annual Average Daily Traffic	0.023 (2.54)	<u>0.017 (1.74)</u>	—
Shoulder width	-0.042 (-2.24)	<u>-0.035 (-1.67)</u>	-0.043 (-1.99)
Pavement Serviceability Index (PSI)	-0.212 (-3.53)	<u>-0.0363 (-0.44)</u>	—
STD of (PSI)	0.26 (2.27)	<u>0.174 (1.37)</u>	—
Signal density	.186 (2.95)	0.273 (3.72)	0.332 (4.60)
Standard deviation of driveway throat width (ft)	—	0.045 (2.47)	0.047 (2.58)
Average width of driveway with flare	—	-0.011 (-2.48)	-0.011 (-2.70)
Standard deviation of driveway width with flare	—	0.015(2.59)	0.014 (2.48)
Proportion of divided driveway, Commercial	—	-0.626 (-2.14)	-0.575 (-2.03)
Dispersion	0.18 (6.67)	0.152 (5.68)	0.161 (5.72)
AIC	966	728	726

19 Underlined variables are not significant in the model at 5% significance level.

20 1. Results from a previous study (6)

21 2. Final model includes only the statistically significant variables

1 CONCLUSION

2 The fundamental differences between freeways and arterials are access control and mobility.
3 Arterial streets connect facilities and properties with the freeways to ensure a successful and
4 timely delivery. This process involves planning the location, spacing of driveways, median
5 openings, interchanges, and street connections to an arterial street, in addition to appropriate
6 spacing of traffic signals and efficient operation of a variety of traffic controls. Proper access
7 management has been found to achieve significant improvements in roadway operations and
8 safety, reducing crash frequency by as much as 60 percent (29). 90% of truck operators in a
9 south Florida study estimated that access management improvements improved safety (30).

10 The main objective of this study was to quantify the safety impact of access parameters
11 on truck-preferred arterial corridors. In addition to existing traffic, geometric and pavement
12 variables, several access related variables were collected manually for the pursuit of having more
13 comprehensive and complete information about truck crash occurrence. Negative binomial
14 regression analysis was used to establish the relationships between truck crashes and arterial
15 street characteristics. Along with driveway design configuration, minimum distance from a
16 driveway to a signalized intersection, signalized intersection density, shoulder width and
17 standard deviation of left turn bay ended up being statistically significant variables for predicting
18 truck crashes. Annual average daily traffic, pavement serviceability index and its standard
19 deviation were no longer statistically significant variables after introducing the access related
20 variables (6).

21 One challenge facing the current crash model development is the data heterogeneity due
22 to the fact that crash data are usually obtained at different times across a wide range of
23 geographical locations. In order to overcome the standard negative binomial model's fixed
24 overdispersion parameterization, a GNB regression method was used for assessing the source of
25 overdispersion. The same variables are statistically significant for the truck crash prediction;
26 though the magnitude changed, the signs are consistent and interpretations are also the same.

27 Finally, the variables that caused the overdispersion of the study data are the million
28 miles traveled by truck, signal density and proportion of divided commercial driveways. The
29 AIC indicates that GNB yields a better goodness of fit than the NB model. The addition of access
30 related variables appears to provide a reasonable explanation of the relationship of truck crashes,
31 and it nullifies a few variables that were statistically correlated with the number of crashes in
32 previous models. The change in statistical significance of these variables may suggest a
33 statistical artifact which can be corrected by including more appropriate variables or by
34 improving model specification.

35 ACKNOWLEDGEMENT

36 This work was sponsored by the National Center for Freight & Infrastructure Research &
37 Education (CFIRE) at the University of Wisconsin-Madison.

38 REFERENCES

- 39 1. Access Management and Highway Safety. Web.
40 http://www.intrans.iastate.edu/ltap/tech_news/2005/jul-sep/access%20management.pdf.
41 Accessed on February 27, 2012.
42

- 1 2. Improving Driveway and Access Management in Michigan. Web.
2 http://www.fhwa.dot.gov/realestate/am_mich.pdf. Accessed on March 21, 2012.
- 3 3. McGuirk, W.W., and G.T. Satterly. Evaluation of Factors Influencing Driveway Accidents.
4 JHRP 76-1, Purdue University, W. Lafayette, IN, 1976, pp. 72.
- 5 4. Maine DOT planning process and programs: Access Management and Corridor Planning.
6 Web. <http://www.maine.gov/mdot/ppp/accessmgmt/factsheet.htm>. Accessed on March 29,
7 2012.
- 8 5. Rawlings, J., and J. L. Gattis. A Detailed Study of Driveway Collision Patterns in an Urban
9 Area. Compendium of Papers DVD, Paper #08-0710, 87th Annual Meeting, Transportation
10 Research Board, Washington, DC, 2008, pp. 15.
- 11 6. Qin, X., A. Sultana, M. V. Chitturi, and D. A. Noyce. Developing a Truck Corridor Crash
12 Severity Index (CSI). In Transportation Research Record: Journal of the Transportation
13 Research Board, Transportation Research Board of the National Academies, Washington,
14 D.C., 2013.
- 15 7. WisTransportal. Web. <http://transportal.cee.wisc.edu/>, accessed on September 5, 2011.
- 16 8. Eisele, W. L., and W. E. Frawley. Estimating the Safety and Operational Impact of Raised
17 Medians and Driveway Density: Experiences from Texas and Oklahoma Case Studies.
18 Transportation Research Record: Journal of the Transportation Research Board, 2005, 1931,
19 pp. 108-116.
- 20 9. Brown, H. C., and A. P. Tarko. The Effects of Access Control on Safety on Urban Arterial
21 Streets. Transportation Research Record: Journal of the Transportation Research Board,
22 1999.
- 23 10. Margiotta, R., and A. Chatterjee. Accidents on Suburban Highways- Tennessee's Experience.
24 Journal of Transportation Engineering. American Society of Civil Engineers, 1995, pp. 255-
25 261.
- 26 11. Lee, C., X. Xu, and V. Nguyen. Analysis of Midblock Crashes in an Urban Divided Arterial
27 Road. Journal of Transportation Safety & Security, vol. 4, no. 1, 2012, pp. 1-18.
- 28 12. Dixon, K. K., R.E. Avelar, L.S. Brown, M.E. Mecham, and I.V. Schalkwyk. The Influence of
29 Land Use and Driveway Placement on the Safety Performance of Arterial Highways.
30 Transportation Research Record: Journal of the Transportation Research Board, 2013.
- 31 13. Flintsch, A. M., H. Rakha, M. Arafeh, D. Dua, A. S. G. Abdel-Salam, and M. Abbas. Safety
32 Impacts of Access Control Standards on Crossroads in the Vicinity of Highway Interchanges.
33 Transportation Research Record: Journal of the Transportation Research Board, No. 2075,
34 2008, pp. 42-52.
- 35 14. Schultz, G. G., K. T. Braley, and T. Boschert. Relationship between Access Management and
36 other Physical Roadway Characteristics and Safety. Journal of Transportation Engineering,
37 136(2), 2009, pp. 141-148.
- 38 15. Schultz, G. G., C. G. Allen, and T. Boschert. Making the Most of an Existing System through
39 Access Management at Major Arterial Intersections. Transportation Research Record:
40 Journal of the Transportation Research Board, No. 2171, 2010, pp. 66-74.
- 41 16. Schultz, G. G., J. S. Lewis, and T. Boschert. Safety Impacts of Access Management
42 Techniques in Utah. Transportation Research Record: Journal of the Transportation Research
43 Board, No. 1994, 2007, pp. 35-42.
- 44 17. Squires, C. A., and P. S. Parsonson. Accident Comparison of Raised Median and Two-Way
45 Left-Turn Lane Median Treatments. In Transportation Research Record: Journal of the

- 1 Transportation Research Board, Transportation Research Board of the National Academies,
2 Washington, D.C., 1989. Vol. No. 1239, pp. 30-40.
- 3 18. Gluck, J. S., H.S. Levinson, and V. Stover. NCHRP Report 420: Impacts of Access
4 Management Techniques. TRB, National Research Council, Washington, D.C., 1999.
- 5 19. Gattis, J.L., J. S. Gluck, J.M. Barlow, R.W. Eck, W. F. Hecker, and H. S. Levinson.
6 Geometric Design of Highways: Final Report. National Cooperative Highway Research
7 Program. Washington, D.C., 2009.
- 8 20. Stover, V., and F. Koepke. Transportation and Land Development. 2nd Edition. Institute of
9 Transportation Engineers, Washington, D.C., 2002.
- 10 21. Access Management Manual, Committee on Access Management. TRB, National Research
11 Council, Washington, D.C., 2003.
- 12 22. Access Management Toolkit. Web. <http://www.ctre.iastate.edu/research/access/toolkit/>.
13 Accessed on January 27, 2013.
- 14 23. Stolof, E. Intersection and Junction Fatalities in the Context of Access Management.
15 Proceedings of the 8th National Conference on Access Management, Baltimore, MD, July
16 13-16, 2008.
- 17 24. STATA. Data Analysis and Statistical Software, 2012.
- 18 25. Hilbe, J. Negative Binomial Regression. Cambridge University Press, Cambridge, UK. 2007.
- 19 26. Miaou, S. P., and D. Lord. Modeling Traffic Crash-Flow Relationships for Intersections:
20 Dispersion Parameter, Functional Form, and Bayes versus Empirical Bayes Methods. In
21 Transportation Research Record: Journal of the Transportation Research Board, No. 1407,
22 National Research Council, Washington, D.C., 2003, pp. 31-40.
- 23 27. Mitra, S., and S. Washington. On the Nature of Overdispersion in Motor Vehicle Crash
24 Prediction Models. Accident Analysis & Prevention, Vol. 39, 2007, pp. 459-468.
- 25 28. Stover, V. Signalized Intersection Spacing. Transportation Research Institute, 1996.
- 26 29. Demosthenes. P. Access Management Policies: An Historical Perspective. International
27 Right-of Way Association Conference, June 23, 1999.
- 28 30. Access Management: Balancing Access and Mobility. Florida Department of Transportation.
29 Web. <http://www.dot.state.fl.us/planning/systems/sm/accman/pdfs/ampromo3.pdf>. Accessed
30 on February 27, 2012.